

**All Husky® Safe-T-Breaks® stop the flow of fuel on both sides of the separation and have passed the demanding UL test requirements on separations without leaking or failing.**

### Models 003360 and 003385

- Retains UL listing after reconnection.
- Features a pre-loaded spring and a single turn wave spring that enables valve to resist sudden pressure build-up in the hose causing nuisance separations.
- Separates at less than 200 lbf / 889.6 N which minimizes "backlash" force of separation, reducing damage to equipment.

### Model 005230

- Retains UL listing after reconnection.
- Uses the same pre-loaded spring and a single turn wave spring as Model 003360.

- Separates at less than 115 lbf / 511.5 N.

### Model 002273 & 002774

- Light-weight, inexpensive and disposable.
- Same instant-closing dual poppet check valve design as Model 003360.
- Separates at less than 300 lbf / 1334.4 N.

### Model 006130

- Internal Pressure Compensating Chamber (PCC) that prevents "line shock" nuisance separations.
- Same instant-closing dual poppet check valve as Model 003360.
- Separates at less than 225 lbf / 1000.8 N.

### Reconnectable with NPT

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
003360**	¾" F x ¾" F Reconnectable Safe-T-Break® with scuff guard	0.59 (0.26)
005230**	¾" F x ¾" F Reconnectable Low-Pull Safe-T-Break® with scuff guard	0.59 (0.26)

### Non-reconnectable with NPT

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
002273	¾" F x ¾" F Non-Reconnectable Safe-T-Break®	0.78 (0.35)
006130**	¾" F x ¾" F PCC Non-Reconnectable Safe-T-Break® with scuff guard	0.52 (0.23)

### Reconnectable with BSPP

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
003385**	¾" F x ¾" F Reconnectable Safe-T-Break® with scuff guard	0.57 (0.25)

### Non-reconnectable with BSPP

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
002774	¾" F x ¾" F Non-Reconnectable Safe-T-Break®	0.73 (0.33)
002774A*	¾" F x ¾" F Non-Reconnectable Safe-T-Break® - Atex	0.73 (0.33)

\*\*See page 2 for guard color options




### Construction

#### RECONNECTABLE SAFE-T-BREAKS®

Body	Aluminum
Seals	Fluorocarbon
Springs	Stainless Steel Stainless steel load and latch spring reverse mechanism Hardened stainless steel latch ring and balls

#### NON-RECONNECTABLE SAFE-T-BREAKS®

Body	Zinc Alloys and Aluminum
------	--------------------------

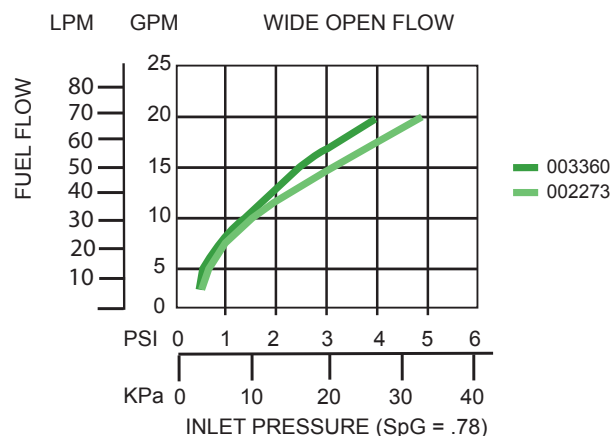

0518  
II 1 G  
EN 13617-2

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

All Husky® Safe-T-Breaks® stop the flow of fuel on both sides of the separation and have passed the demanding UL test requirements on separations without leaking or failing.

## Dimensions and System Options

### Whip Hoses

MODEL NO.	DESCRIPTION
NPT	
002274	¾" M x ¾" M (19 mm M x 19 mm M) Whip Hose
227374	¾" M x ¾" M (19 mm M x 19 mm M) Whip Hose connected to Model 002273 ¾" F x ¾" F Non-Reconnectable Safe-T-Break®
336074**	
002275	¾" M x ¾" M (19 mm M x 19 mm M) Whip Hose connected to Model 003360 ¾" F x ¾" F Reconnectable Safe-T-Break®
227375**	¾" M x ¾" M (19 mm M x 19 mm M) Whip Hose with Swivel Nut connected to Model 002273 ¾" F x ¾" F Non-Reconnectable Safe-T-Break®
336075**	
002275	¾" M x ¾" M (19 mm M x 19 mm M) Whip Hose with Swivel Nut connected to Model 003360 ¾" F x ¾" F Reconnectable Safe-T-Break®
BSP	
002775	¾" M x ¾" M (19 mm M x 19 mm M) Whip Hose

### Guards

MODEL NO.	DESCRIPTION
003096**	Scuff Guard for Model #003360, 006130 and 005230
006503**	Dispenser Scuff Guard for Model #002273 and 002774

### Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
007000	Safe-T-Break® Drain Cup
003813	Safe-T-Break® Demonstration Kit

### Color Chart


COLOR	SUFFIX	COLOR	SUFFIX
Blue	-01	White	-06
Red	-02	Gold	-08
Green	-03	Silver	-09
Black	-04	BP Green	-16
Yellow	-05	Pink	-20

\*\*Safe-T-Breaks® and Safe-T-Break® Scuff Guards are to be ordered with the corresponding guard color option added to the model number.


Example: If BLUE guards are desired, add guard color option -01 to the model number (004034-01).

For custom colors, a minimum order of 4,000 guards will be required.

Model 003360

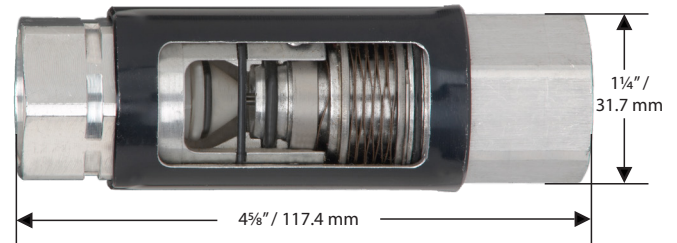

Model 006130

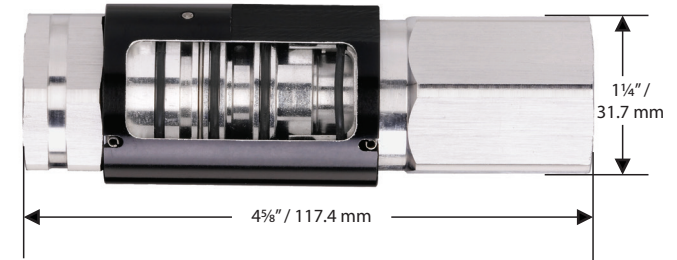

Model 002273

